

P.O. Box 654  
Katy, Texas 77942-0654  
Toll Free: (866) 794-8357  
Fax: (281) 391-6760  
Email: info@cruiserlift.com

***Fast Master Products, Inc.***


# ***CRUISER RAMP***

## **Memo**

From: Fast Master Products, Inc.  
Date: 9/30/2005  
Re: Cruiser Ramp – Pickup Motorcycle Loader

---

Introducing the Cruiser Ramp Motorcycle loading system for full size pick-up trucks. The Cruiser Ramp system was designed with quality, ease of installation, ease of operation, and cost involved. The system will install into full size pick-up beds with bed lengths of 5'-6", 6'-6", or 8', and widths between the wheel wells of at-least 42 inches. These dimensions are somewhat standard in the full size pick-up market. This includes the Chevrolet Avalanche and like vehicles.

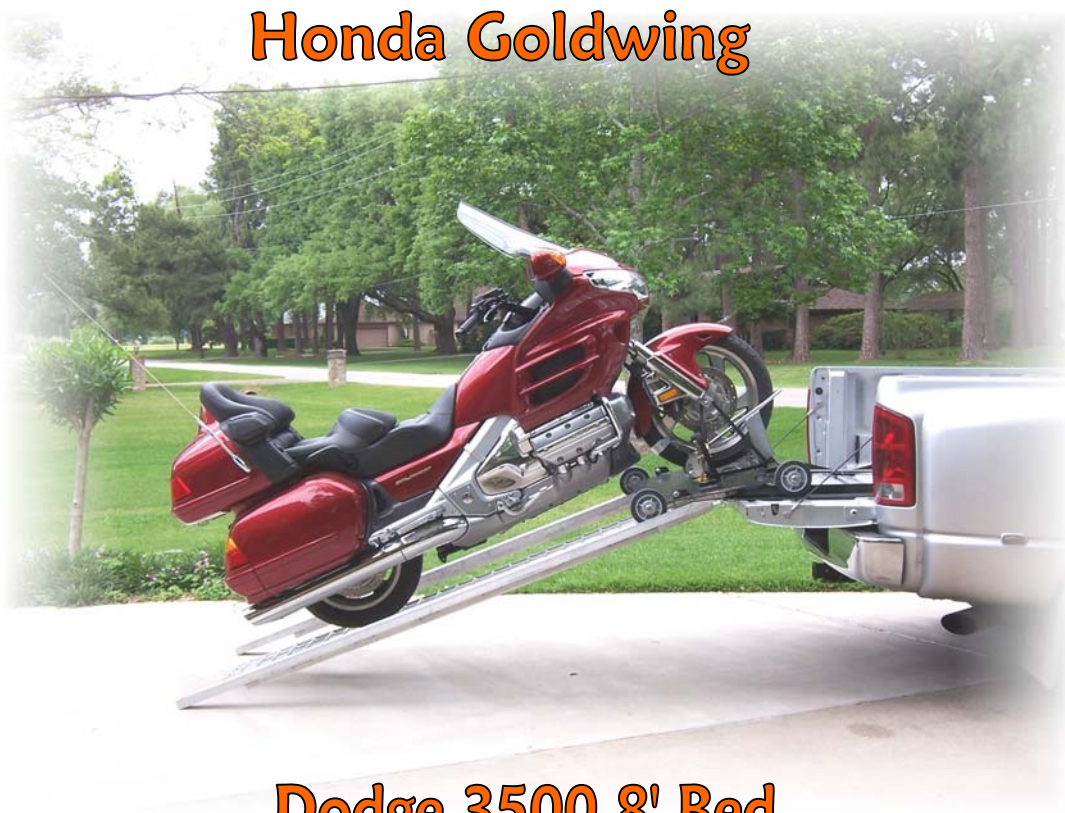

**Honda Goldwing**

**Dodge 3500 8' Bed**

## **STANDARD FEATURES INCLUDE:**

- The Cruiser Ramp System is shipped fully assembled directly to the customer, ready for installation into the pick-up bed. It is easily installed and removed from the pick-up bed.
- The Cruiser Ramp system allows you to close the tailgate with the system installed and the bike removed. You do not have to remove the system on any bed length to close the tailgate.
- With 8' bed lengths, the tailgate may be closed with the bike loaded. This depends on the motorcycle dimensions.

### **Ford F150 6'-6" Bed Length**



- The motorcycle may be loaded with or without the tailgate installed, when loading into an 8' bed length.
- The Cruiser Ramp system has a unique removal system for the motorcycle. As the motorcycle is loaded, springs are placed under tension. When the winch is activated to remove the motorcycle, the springs will pull the motorcycle out of the bed. Once the rear tire drops past the tailgate, gravity takes over and the motorcycle is removed without having to pull it out of the bed.

### **Ford F150 6'-6" Bed Length**



- 3000 Pound Electric Winch with 3/16" wire rope cable.
- Remote Switch with 15 feet of cable. This allows you to stand by and observe the motorcycle while loading and unloading.
- Safety Chains.
- Loading Ramps. Rear tire ramp rated to 1500 pounds.
- Black Semi-Gloss Powder Coat for long lasting looks. May be touched up if scratched.
- Self-Locking Motorcycle Wheel Chock for the front tire. Includes two Ratchet Tie-Down Straps for the front axle.

- ❖ The photo below shows the ground clearance at the rear of a Honda Goldwing at the maximum loading angle.



- ❖ The photo below shows a Honda Goldwing loaded into a pickup.



- ❖ The photo below shows a 95<sup>th</sup> anniversary HD Fat Boy being loaded into a pickup.



❖

The photo below shows a 95<sup>th</sup> anniversary HD Fat Boy loaded into a pickup.



**Dodge 3500 8" Bed Length**

- ❖ The photo below shows a 95<sup>th</sup> anniversary HD Fat Boy loaded into a pickup with the tailgate closed.




**Dodge 3500 8" Bed Length**

- ❖ The following photo shows a 95<sup>th</sup> anniversary HD Fat Boy with ramp holders installed.



- ❖ Shown with a 31 foot Alumascap travel trailer & bike loaded.

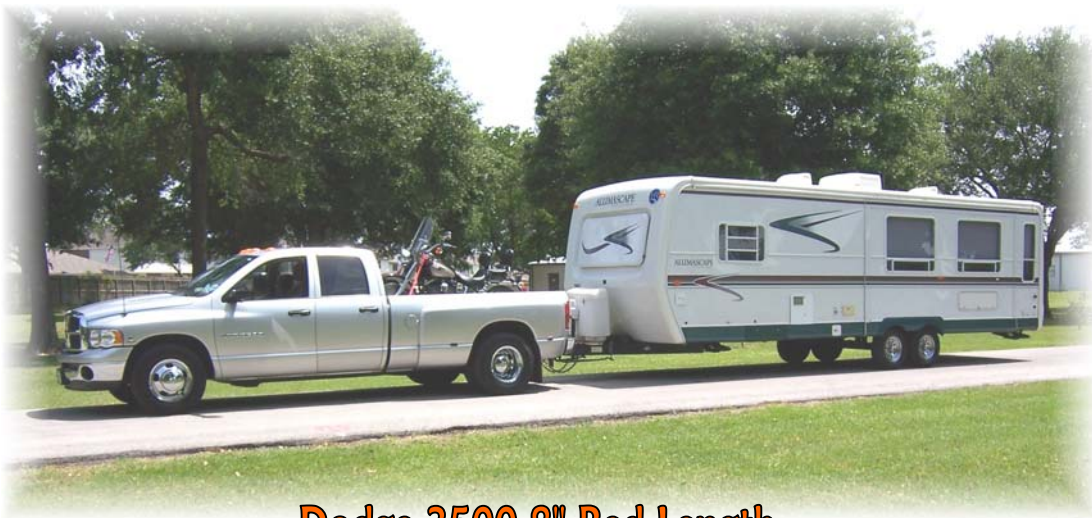

**Dodge 3500 8" Bed Length**

- ❖ Cruiser Ramp system with bike loaded and ramps stored. Photo taken from the top of the travel trailer.



- ❖ The following photo shows a 95<sup>th</sup> anniversary HD Fat Boy loaded into a pickup. Shown with loading ramps stored in their holders.

